


Hipo V2

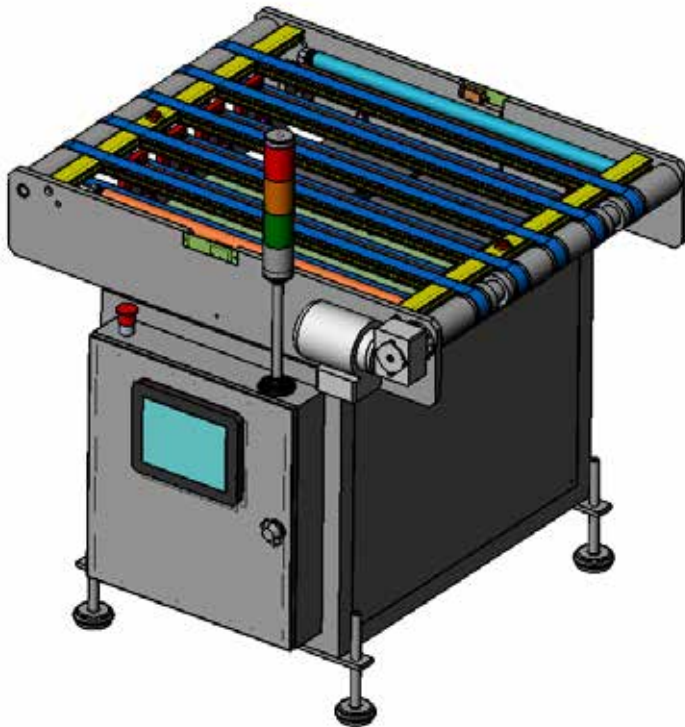

The Diverter Hipo V-2 was designed to divert PCB panels in all directions. Can be installed in the middle of a horizontal line or at the end according to technical or floor space requirements.

The Hipo can operate individually or can be operated by the machine it is linked to according to the customer's needs. The conveyor speed can vary from 0.5m/min up to 5 m/min achieving a maximum number of 5 panels per minute. The device is equipped with stainless steel rollers on the X direction and flat belts on the Y direction in order to adapt to all possible configurations.

The Hipo is equipped with a PLC and a touch screen with an easy operator interface and can be custom programmed to meet special customer requirements.

	Length	Width	Thickness	Weight	Line speed range	
Max. Panel Size	650mm	530mm	3,4-5mm	5 Kg	Panel / min	4
Min. Panel Size	450mm	350mm	0,8 mm	0,2 Kg	Max m / min	5
					Min m/min	0,5

Youtube channel



Application Examples

